

# FOXJET®

AN ITW COMPANY



## ProSeries® *384/768*

High Resolution InkJet Printing



### Features and Benefits:



**Smart Clean System** keeps print sharp and reduces maintenance downtime with automated solvent and ink flush to remove environmental debris.


**High Resolution Print** for barcodes, logos, graphics, and alphanumerics.

**Stainless steel face plates** provide maximum reliability in harsh environments.


**Reliable printheads** using the Trident based print engine allows for maximum uptime, reliability and repairability.

**Longest Warranty** in the industry, ask your distributor for details.

### Dimensions: 384 Printhead

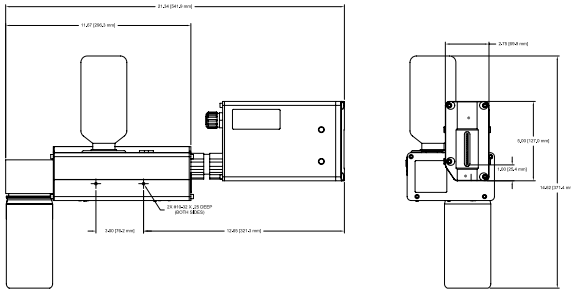

### Dimensions: 768 Printhead

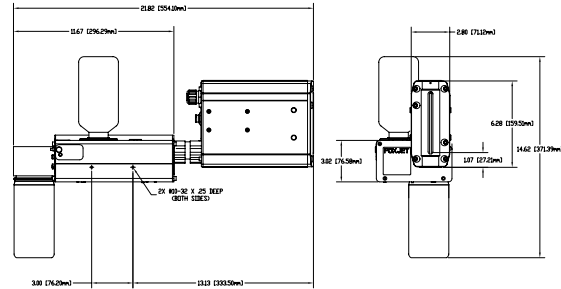

### Printhead Specifications:

<b>Print Height</b>	Image area up to 2"
<b>Print Orientation</b>	Integrated -- horizontal or horizontal angle, Modular -- print down applications
<b>Mounting Angle</b>	90°
<b>Orifices/Channels</b>	384/128
<b>Lines of Print</b>	Up to 21 lines
<b>Horizontal Resolution</b>	Selectable up to 300dpi
<b>Throw Distance</b>	Up to 1/8"
<b>Operating Conditions</b>	Temperature: 50° - 104° F (10° - 40° C), Relative humidity: 20% - 80% (non-condensing)
<b>Cable Lengths</b>	30' standard, 10' and 25' extensions available
<b>Priming</b>	Automatic Priming System, standard
<b>Ink Delivery</b>	Dual feed system
<b>Sensors</b>	Float switch low ink sensor and full waste bottle sensor
<b>Ink</b>	ScanTrue II black
<b>Substrates</b>	Formulated for porous surfaces
<b>Applications</b>	Formulated for barcodes, logos, graphics and text messages
<b>Drying Time</b>	Less than 1/4 second on porous surfaces

<b>Print Height</b>	Image area up to 4"
<b>Print Orientation</b>	Integrated -- horizontal or horizontal angle, Modular -- print down applications
<b>Mounting Angle</b>	90°
<b>Orifices/Channels</b>	768/256
<b>Lines of Print</b>	Up to 42 lines
<b>Horizontal Resolution</b>	Selectable up to 300dpi
<b>Throw Distance</b>	Up to 1/8"
<b>Operating Conditions</b>	Temperature: 50° - 104° F (10° - 40° C), Relative humidity: 20% - 80% (non-condensing)
<b>Cable Lengths</b>	30' standard, 10' and 25' extensions available
<b>Priming</b>	Automatic Priming System, standard
<b>Ink Delivery</b>	Dual feed system
<b>Sensors</b>	Float switch low ink sensor and full waste bottle sensor
<b>Ink</b>	ScanTrue II black
<b>Substrates</b>	Formulated for porous surfaces
<b>Applications</b>	Formulated for barcodes, logos, graphics and text messages
<b>Drying Time</b>	Less than 1/4 second on porous surfaces

videos

inkjet coders



product info

scan me